

FORM PTO-1390  
REV. 2/01T

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

07553.0028

U.S. APPLICATION NO.  
(If known, see 37CFR1.5)**10/069208**

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/05623

August 23, 2000

August 23, 1999

TITLE OF INVENTION  
METHOD OF ETCHING

APPLICANT(S) FOR DO/EO/US

Ken KOBAYASHI, Masaaki HAGIHARA, Wakako NAITO, and Koichiro INAZAWA

Applicant(s) herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c)(2)).
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed with the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154 (d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)).
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☒ Information Disclosure Statement under 37 CFR 1.97 and 1.98
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A Substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154 (d)(4).
19. ☐ A second copy of the English language translation of the international application 35 U.S.C. 154 (d)(4).
20. ☒ Other items or information:
  - a. ☒ Copy of cover page of International Publication No. WO 01/15213
  - b. ☐ Copy of Notification of Missing Requirements.
  - c. ☐

U.S. APPLICATION NO. (if known, see 37CFR 1.5) <b>10/069208</b>		INTERNATIONAL APPLICATION NO. PCT/JP00/05623		ATTORNEY'S DOCKET NUMBER 07553.0028	
21. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
<b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b>					
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO .....				\$1040.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .....				\$890.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search fee (37 CFR 1.445(a)(2)) paid to USPTO .....				\$740.00	
International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) .....				\$710.00	
International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33 (1)-(4) .....				\$100.00	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).				<input type="checkbox"/> 20 <input type="checkbox"/> 30 \$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	5	- 20 =	x \$18.00	\$	
Independent Claims	1	- 3 =	x \$84.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$	
<b>TOTAL OF THE ABOVE CALCULATIONS =</b>				\$890.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
<b>SUBTOTAL =</b>				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest priority date (37 CFR 1.492(f)).				<input type="checkbox"/> 20 <input type="checkbox"/> 30 \$	
<b>TOTAL NATIONAL FEE =</b>				890.00	
Fee for recording the enclosed assignment (37 CFR 1.21 (h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property.				+\$40.00	
<b>TOTAL FEES ENCLOSED =</b>				\$930.00	
				Amount to be refunded: \$	
				charged: \$	
a. <input checked="" type="checkbox"/> A check in the amount of \$ 930.00 to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-0916. A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.					
<b>SEND ALL CORRESPONDENCE TO:</b> Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P. 1300 I Street, N.W. Washington, D.C. 20005-3315					
				SIGNATURE David W. Hill/28,220	
DATED: February 22, 2002				NAME/REGISTRATION NO. ERNEST F. CHAPMAN Reg. No. 25,901	

2002-02-22 10:00:00

## SPECIFICATION

## Method of Etching

## TECHNICAL FIELD OF THE INVENTION

The present invention relates to a method of etching.

## BACKGROUND ART

Conventionally, in using Al alloy for the wiring of semiconductor element, the wiring pattern is formed by depositing the Al alloy by sputtering on a layer insulating film and then by etching. In this conventional dry-method of etching, the pressure in a process chamber is generally several to 100 mTorr. According to JP60-170238, the maximum etching speed can be achieved at 50-100 mTorr.

On the other hand, the Cu wiring formation called damascene process is made recently. The damascene process is a method for forming the groove of wiring pattern on the layer insulating film and embedding the wiring material in the groove. The specific resistance becomes halved and the etching speed can be easily high by changing the wiring material from Al alloy to Cu. Since flattening can be easily achieved by Chemical Mechanical Polishing (CMP) recently, the damascene process has become easy to be utilized.

Also, there is a technology called dual damascene as the applied technology of the damascene process. The dual damascene is a technology of forming a wiring and a via hole at the same time by forming an inverted convex groove on which the wiring and the via hole are formed in the later step and by embedding metal substance for wiring in the groove. In forming the inverted convex groove for the dual damascene, it is necessary to control so that the bottom of the formed groove may be made flat when the etching is stopped before the etching goes through the layer insulating film.

However, there are the following problems: when the inverted convex groove for the dual damascene is formed at the conventional pressure range of several to 100 mTorr, the bottom of the groove cannot be made flat and so-called micro trenching is occurred; and the selectivity for the etching mask (hereafter, referred to as "mask selectivity") is low.

To prevent the micro trenching, a layer as a ground (hereafter, referred to as an "etch stop") is formed at a desired depth. However, since the etch stop has a high dielectric constant, a capacitor is formed between the wirings. In the most advanced technology with increasingly fine wirings, there is an urgent need to develop a method of etching capable of preventing micro trenching without using an etch stop.

The present invention has been achieved in views of aforementioned problems. The first object of the present invention is to provide a novel and improved method of etching capable of preventing micro trenching without using an etch stop.

Further the second object of the present invention is to provide a novel and improved method of etching capable of improving mask selectivity.

#### DISCLOSURE OF THE INVENTION

According to the present invention to achieve the above objects, there is provided a method of etching for etching an organic film on a workpiece placed in a hermetically sealed process chamber filled with process gas wherein: the process gas includes at least nitrogen atoms and hydrogen atoms; and a pressure in the process chamber is substantially higher than 500 mTorr. Preferably, the organic film is made from a low-dielectric constant material with the relative dielectric constant less than 3.5. Also preferably, the pressure in the process

chamber is substantially 500-800 mTorr.

If the process gas includes at least nitrogen atoms and hydrogen atoms and a pressure in the process chamber is set substantially higher than 500 mTorr, micro trenching can be prevented without using an etch stop and mask selectivity can be improved. Therefore, the effect can be achieved especially in the process with the necessity to stop etching before the etching goes through the organic film, for example, dual damascene process and the like.

In addition, N<sub>2</sub> can be adopted as the gas including nitrogen atoms and H<sub>2</sub> as hydrogen atoms. If N<sub>2</sub> and H<sub>2</sub> are adopted as the component of the process gas as this, the process gas can be easily treated and will not easily cause greenhouse warming even if the process gas is released to atmosphere. Furthermore, since N<sub>2</sub> and H<sub>2</sub> are cheap, the cost for process will not increase.

Also, if the process gas includes Ar, the control of the groove shape can be facilitated.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic sectional view of an etching apparatus that may adopt the present invention;

FIG. 2 schematically illustrates an implementation example 1 of the present invention;

FIG. 3 schematically illustrates an implementation example 2 of the present invention;

FIG. 4 is a schematic sectional view of another etching apparatus that may adopt the present invention; and

FIG. 5 schematically illustrates an implementation example 3 of the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

The following is a detailed explanation of preferred implementation examples of the method of etching according to the present invention, given in reference to the attached drawings. It is to be noted that in this specification and the drawings, the same reference numbers are assigned to components achieving essentially identical functions and structural features to preclude the necessity for repeated explanation thereof.

(1) Structure of etching apparatus

First, in reference to FIG. 1, an etching apparatus 100 that may adopt the method of etching in the implementation example is explained.

Inside a process container 102 of the etching apparatus 100 in the figure, a process chamber 104 is formed, and inside the process chamber 104, a lower electrode 106 constituting a susceptor capable of moving up and down freely is provided. At the top of the lower electrode 106, an electrostatic chuck 110 connected to a high-voltage DC source 108 is provided, and a workpiece such as a semiconductor wafer (hereafter referred to as a "wafer") W is placed on the upper surface of the electrostatic chuck 110. In addition, a focus ring 112 achieving an insulating property is provided around the wafer W placed on the lower electrode 106. A high-frequency source 120 is connected to the lower electrode 106 via a matcher 118.

At the ceiling of the process chamber 104 facing opposite the mounting surface of the lower electrode 106, an upper electrode 122 having numerous gas outlet holes 122a is provided. An insulator 123 is provided between the upper electrode 122 and the process container 102. A high-frequency source 121 that outputs plasma generating high-frequency power is connected to the upper electrode 122 via a matcher 119. A gas supply pipe 124 is connected to the gas outlet holes 122a, and in the example shown in the figure, first ~ third

branch pipes 126, 128 and 130 are connected to the gas supply pipe 124.


A gas supply source 136 that supplies  $N_2$  is connected to the first branch pipe 126 via an open/close valve 132 and a flow-rate regulating valve 134. A gas supply source 142 that supplies  $H_2$  is connected to the second branch pipe 128 via an open/close valve 138 and a flow-rate regulating valve 140. A gas supply source 148 that supplies Ar is connected to the third branch pipe 130 via an open/close valve 144 and a flow-rate regulating valve 146. The inert gas added into the process gas is not limited to Ar in the example above and any inert gas including He and Kr may be used instead, as long as it can be utilized to adjust the plasma excited inside the process chamber 104.

In addition, near the bottom of the process container 102, a gas discharge pipe 150 which communicates with a vacuum drawing mechanism (not shown) is connected, and through the function of the vacuum drawing mechanism, the atmosphere inside the process chamber 104 is sustained at a specific reduced pressure.

(2) Structure of wafer

Next, the structure of the wafer W to undergo the etching process through the method of etching in the implementation example is explained.

The wafer W used in the implementation example has a layer insulating film to undergo the etching process formed on a Cu layer. The layer insulating film is made from an organic material with low-dielectric constant much lower than a conventional  $SiO_2$  film in the relative dielectric constant such as polyorganosiloxane-bridged benzocyclobutene resin (hereafter, referred to as "BCB"), DowChemical-made SiLK (trade name) and FLARE (trade name) which has the following structure.

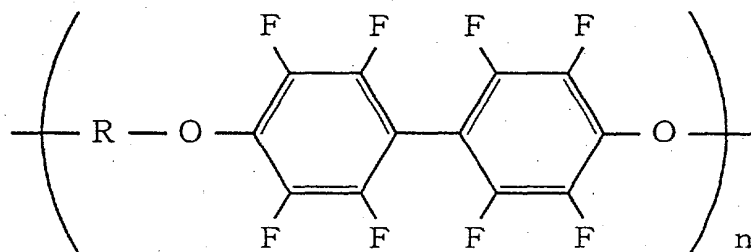

(Chemical Compound 1)

In addition, an etching mask having a specific pattern is formed on the layer insulating film. This etching mask may be constituted of a photoresist film layer, or SiO<sub>2</sub> film and a photoresist film for instance.

Next, an etching process performed using the etching apparatus 100 described above to form contact holes on the wafer W through the method of etching in the implementation example is explained.

First, the wafer W is placed on the lower electrode 106 the temperature of which has been preset to a specific level, and the temperature of the wafer W is sustained at approximately 20°C ~ 60°C in conformance to particular requirements of the process. Next, the process gas in the implementation example, i.e., the process gas achieved by mixing N<sub>2</sub>, H<sub>2</sub> and Ar, is induced into the process chamber 104 while adjusting the flow rates of the individual gases through the flow-rate regulating valves 134, 140 and 146 inserted at the gas supply pipe 124. During this process, vacuum drawing is implemented inside the process chamber 104 to achieve a specific pressure level for the atmosphere inside the process chamber 104, which will correspond the requirements of the process, substantially at higher than 500mTorr, more preferably 500-800 mTorr.



Next, high-frequency power with a frequency of 2 MHz and a power level of 600-1400 W, for instance, is applied to the lower electrode 106. In addition, high-frequency power with a frequency of 60 MHz and a power level of 600-1400 W, for instance, is applied to the upper electrode 122. As a result, high density plasma is generated inside the process container 102 and contact holes achieving a specific shape are formed at the layer insulating film of wafer W constituting of an organic material with low-dielectric constant with the plasma.

This implementation example is configured as described above. Since the process gas includes at least nitrogen atoms and hydrogen atoms under a pressure substantially higher than 500 mTorr in the process chamber, micro trenching can be prevented without using an etch stop. Mask selectivity is also improved.

Since  $N_2$  and  $H_2$  are adopted as the component of the process gas, the process gas can be easily treated and will not easily cause greenhouse warming even if the process gas is released to atmosphere. Further, since  $N_2$  and  $H_2$  are cheap, the cost for process will not increase. Also, since the process gas includes Ar, the control of the groove shape can be facilitated as the etching condition can be easily controlled. Furthermore, since a specific etching process can be achieved without adding  $O_2$  into the process gas, the oxidization of the Cu layer can be prevented during the process. Consequently, it is not necessary to form an oxidization-prevention film on the Cu film, and workpiece can be relatively thinner.

Next, specific implementations of the method of etching according to the present invention are explained in reference to FIGS. 2-5. It is to be noted that since contact holes are formed at the layer insulating film of the wafer W by using the etching apparatus 100 explained in reference to the above implementation example, the same reference numbers are assigned to components of the etching

apparatus 100 and the wafer W achieving roughly identical functions and structural features to preclude the necessity for repeated

Implementation example	Flowrate of process gas (sccm)			Pressure level for atmosphere in process chamber (mTorr)	Etching rate ( /m)		Trenching (%)		Sectional shape of contact hole
	N <sub>2</sub>	H <sub>2</sub>	Ar		center	edge	center	edge	
1 (a)	400	400	0	100	3958	4000	117	120	Fig. 2 (a)
1(b)	400	400	0	500	3792	3354	100	112	Fig. 2 (b)
1(c)	400	400	500	800	4043	3532	87	104	Fig. 2(c)

explanation thereof in the implementation examples 1 and 2 described later. In addition, unless specifically indicated, the etching process conditions are set virtually the same as those in the implementation example described above.

(A) Implementation Example 1 (change of pressure level for the atmosphere inside process chamber)

In reference to FIG. 2, implementation examples 1(a)-(c) achieved by changing the pressure level for the atmosphere inside the process chamber 104 are explained.

In example 1(a)-(c), the etching process was performed by basing on the condition as in the following table to form contact holes at the layer insulating film of the wafer W described earlier.

(Table 1)

It is to be noted that the central part of wafer W is designated as center, the end part of wafer W as edge and the part in the middle of central and end parts as middle in the table and the drawing. Also, trenching is the ratio of the depth of etching at the end part of contact

holes to the depth of etching at the roughly central part of contact holes. The more the ratio becomes, the more degree of micro trenching

Implementation example	Flowrate of process gas (sccm)			Pressure level for atmosphere in process chamber (mTorr)	Etching rate (/m)		Trenching (%)		Sectional shape of contact hole
	N <sub>2</sub>	H <sub>2</sub>	Ar		center	edge	center	edge	
2 (a)	400	400	0	100	3063	3146	157	153	Fig. 3 (a)
2(b)	400	400	0	500	3521	3146	114	126	Fig. 3 (b)
2(c)	400	400	500	800	3638	3426	89	106	Fig. 3(c)

making a bad influence on the shapes of contact holes is made.

In the implementation examples 1(b) and (c) as a result, contact holes with good shapes can be formed without lowering the etching rate, as shown in table 1 and FIGS. 2(b) and (c). In the implementation example 1(a) on the other hand, micro trenching is formed on the contact holes.

(B) Implementation Example 2 (change of pressure level for the atmosphere inside process chamber)

In reference to FIG. 3, implementation examples 2(a)-(c) achieved by changing the pressure level for the atmosphere inside the process chamber 104 are explained. In this implementation example, the width of formed contact hole is changed under the same condition as in the implementation

(Table 2)

example 1.

In example 2(a)-(c), the etching process was performed by basing on the condition as in the following table to form contact holes at the layer insulating film of the wafer W described earlier.

In the implementation examples 2(b) and (c) as a result, contact holes with good shapes can be formed without lowering the etching rate, as shown in table 2 and FIGS. 3(b) and (c). In the implementation example 2(a) on the other hand, micro trenching is formed on the contact holes. Judging from the result in this implementation example, if the pressure inside the process chamber is set at a specific level, contact holes with good shapes can be formed even when the width of contact hole is changed.

(C) Implementation Example 3 (change of flow rate of  $N_2$  and  $H_2$ )

In reference to FIG. 4, implementation example 3 achieved by changing the flow rate of  $N_2$  and  $H_2$  constituting the process gas by using an etching apparatus 200 detailed later is explained.

First, in reference to FIG. 4, an etching apparatus 200 that may adopt the method of etching in the implementation example is explained. Inside a process container 202 of the etching apparatus 200 in the figure, a process chamber 204 is formed, and inside the process chamber 204, a lower electrode 206 constituting a susceptor capable of moving up and down freely is provided. At the top of the lower electrode 206, an electrostatic chuck 210 connected to a high-voltage DC source 208 is provided, and a wafer W is placed on the upper surface of the electrostatic chuck 210. In addition, a focus ring 212 achieving an insulating property is provided around the wafer W placed on the lower electrode 206. A high-frequency source 220 outputting plasma generating high-frequency power is connected to the lower electrode 206 via a matcher 220.

At the ceiling of the process chamber 204 facing opposite the mounting surface of the lower electrode 206, an upper electrode 222 having numerous gas outlet holes 222a is provided. In this implementation example, the upper electrode 222 composes a part of the process container 202. A gas supply pipe 224 is connected to the

gas outlet holes 222a as the etching apparatus 100, and in the example shown in the figure, first and second branch pipes 224 and 228 are connected to the gas supply pipe 224.

A gas supply source 236 that supplies  $N_2$  is connected to the first branch pipe 226 via an open/close valve 232 and a flow-rate regulating valve 234. A gas supply source 242 that supplies  $H_2$  is connected to the second branch pipe 228 via an open/close valve 238 and a flow-rate regulating valve 240. It is to be noted that a third branch pipe may be provided to supply

(Table 3)

inert gas such as Ar as in the etching apparatus 100.

In addition, near the bottom of the process container 202, a gas discharge pipe 150 as in the etching apparatus 100 is connected. Further, a magnet 238 is arranged covering the outside-wall of the process container 202 outside the process chamber 204. A gyromagnetic field is formed in the plasma region located between the upper electrode 222 and the lower electrode 206.

In this implementation example, the temperature of the wafer W is sustained approximately at  $20^{\circ}\text{C} \sim 80^{\circ}\text{C}$ . And then high-frequency power with a frequency of 13.56 MHz and a power level of 500-1500 W, for instance, is applied to the lower electrode 206

In example 3(a)-(d), the etching process was performed by basing on the condition as in the following table to form contact holes

Implementation example	Flowrate of process gas (sccm)		Etching width ( $\mu$ m)	Pressure level for atmosphere in process chamber (mTorr)	Etching rate (/m)			Sectional shape of contact hole
	N <sub>2</sub>	H <sub>2</sub>			center	middle	edge	
3 (a)	200	200	0.35	500	4500/ 5125	4750/ 5250	5250/ 5750	Fig. 5 (a)
3(b)	200	200	0.30	500	4875/ 5250	5000/ 5375	5000/ 5500	Fig. 5 (b)
3(c)	100	100	0.35	500	5000/ 5625	4875/ 5500	5000/ 5625	Fig. 5(c)
3(d)	100	100	0.30	500	4750/ 5250	5000/ 5625	5125/ 5500	Fig.5 (d)

at the layer insulating film of the wafer W described earlier.

In the implementation examples 3(a)-(d) as a result, contact holes with good shapes can be formed at any flow rate, as shown in table 3 and FIG. 5. Judging from the result in this implementation example, if the pressure inside the process chamber is set at a specific level for the atmosphere, contact holes with good shapes can be formed even when the flow rate of N<sub>2</sub> and H<sub>2</sub> is changed.

While the invention has been particularly shown and described with respect to the preferred implementation example thereof by referring to the attached drawings, the present invention is not limited to these examples and it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit, scope and teaching of the invention.

For instance, while an explanation is given in reference to the implementation example above on an example in which a process gas is constituted by mixing N<sub>2</sub> and H<sub>2</sub>, or mixing N<sub>2</sub>, H<sub>2</sub> and Ar, the

present invention is not limited to this example. For instance, the present invention may be implemented by adding various kinds of gasses such as  $O_2$  and an inert gas in the process gas constituted by mixing  $N_2$ ,  $H_2$  and Ar. In other words, the present invention can be implemented using any process gas containing at least nitrogen atoms and hydrogen atoms.

In addition, while an explanation is given in reference to the individual implementation examples on an instance in which the present invention is implemented on a plane parallel plate type etching apparatus and an etching apparatus in which a magnetic field is formed, the present invention is not limited to such details. It may be adopted in any of various types of plasma etching apparatuses including an inductive coupling type etching apparatus having an electrostatic shield and a microwave etching apparatus.

Moreover, while an explanation is given above in reference to the implementation example on an example in which contact holes are formed at the layer insulating film formed at the wafer and constituting of organic material with low-dielectric constant, the present invention is not limited to this example and it may be adopted when performing any type of etching process on a layer insulating film formed at a workpiece.

According to the present invention, micro trenching can be prevented without using an etch stop. Mask selectivity is also improved.

Further according to the present invention, the process gas can be easily treated and will not easily cause greenhouse warming even if the process gas is released to atmosphere. In addition, the cost for process will not increase.

Still further according to the present invention, the control of the groove shape can be facilitated as the etching condition can be

## INDUSTRIAL APPLICABILITY

As explained above, the present invention may be adopted a method of etching and, in particular, it is ideal in a method of etching in which there is needed to prevent micro trenching and improve mask selectivity.

As explained above, the present invention may be adopted a method of etching and, in particular, it is ideal in a method of etching in which there is needed to prevent micro trenching and improve mask selectivity.



## CLAIMS

1. A method of etching for etching an organic film on a workpiece placed in a hermetically sealed process chamber filled with process gas wherein: the process gas includes at least nitrogen atoms and hydrogen atoms; and  
a pressure in the process chamber is substantially higher than 500 mTorr.
2. A method of etching according to claim 1 wherein the pressure in the process chamber is substantially higher than 500 mTorr.
3. A method of etching according to claim 1 wherein the nitrogen atoms constitute  $N_2$  and the hydrogen atoms constitute  $H_2$ .
4. A method of etching according to claim 1 wherein the process gas further includes Ar.
5. A method of etching according to claim 1 wherein the etching on the organic film is stopped before the etching goes through the organic film.

## ABSTRACT

A method of etching prevents micro trenching without using an etch stop. Organic film on a wafer (W) placed in a hermetically sealed process chamber filled with process gas is etched. The gas includes  $N_2$  and  $H_2$ , and the pressure in the process chamber is substantially 500-800 mTorr. When the process gas includes at least nitrogen atoms and hydrogen atoms under a pressure substantially higher than 500 mTorr in the process chamber, micro trenching can be prevented without using an etch stop. Mask selectivity is also improved.

202209-5025001

## EXPLANATION OF REFERENCE NUMERALS

- 100 etching apparatus
- 102 process container
- 104 process chamber
- 106 lower electrode
- 108 high-voltage DC source
- 110 electrostatic chuck
- 112 focus ring
- 118 matcher
- 119 matcher
- 120 high-frequency source
- 121 high-frequency source
- 122 upper electrode
- 122a gas outlet holes
- 123 insulator
- 124 gas supply pipe
- 126, 128, 130 branch pipe (first branch pipe, second branch pipe, third branch pipe)
- 132, 138, 144 open/close valve
- 134, 140, 146 flow-rate regulating valve
- 136, 142, 148 gas supply source
- 150 gas discharge pipe
- W wafer

FIG. 1

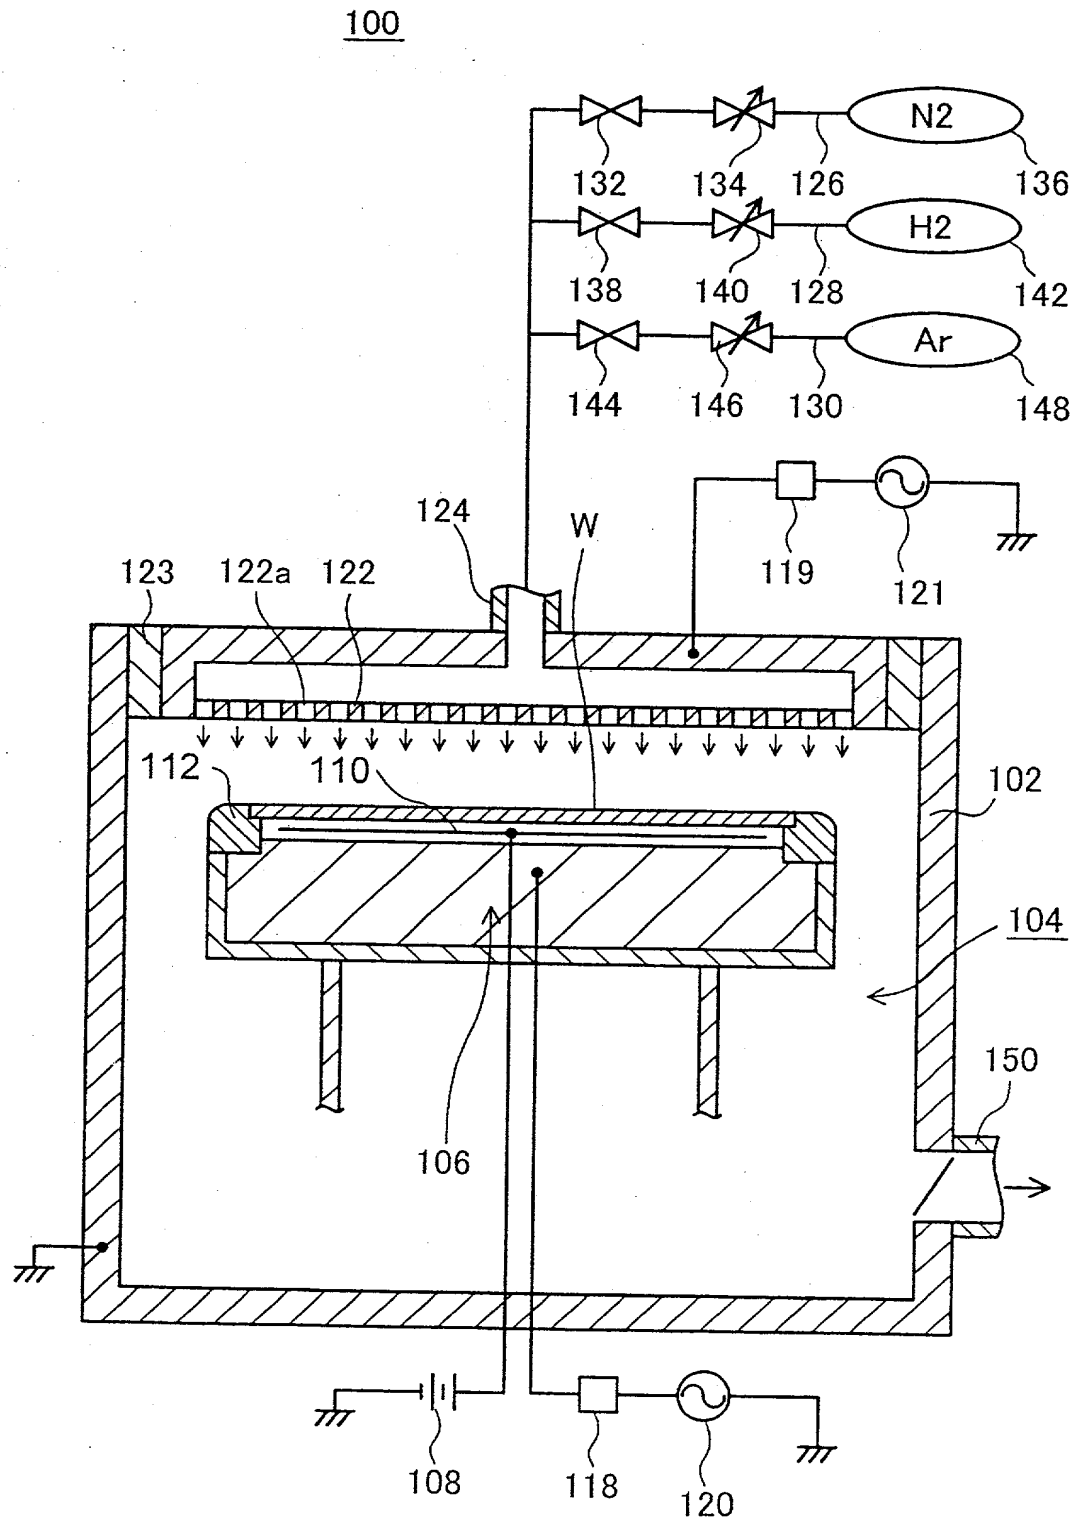


FIG.2(a)

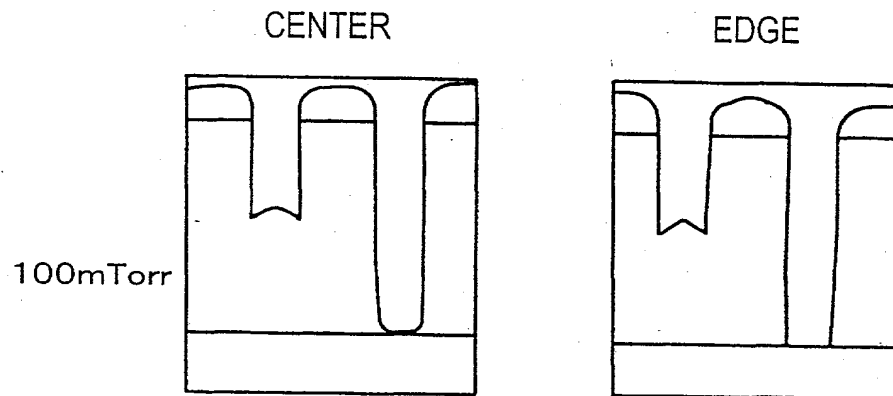


FIG.2(b)

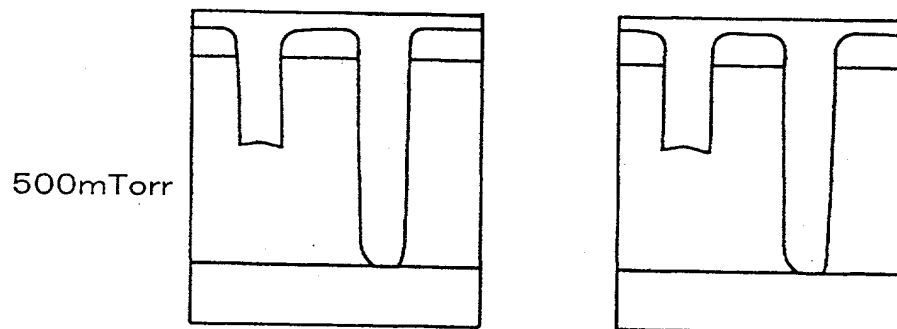


FIG.2(c)

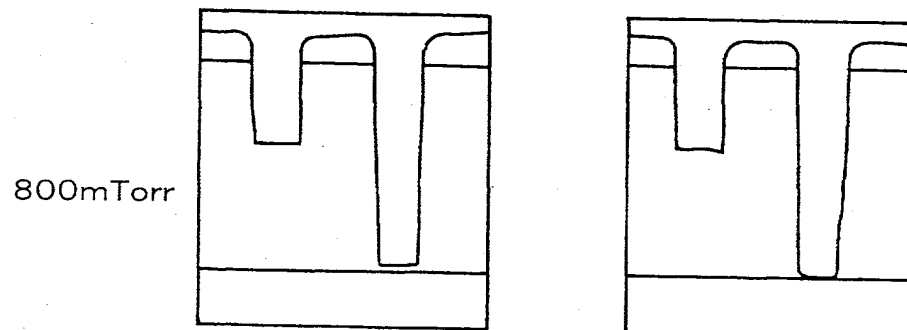


FIG.3(a)

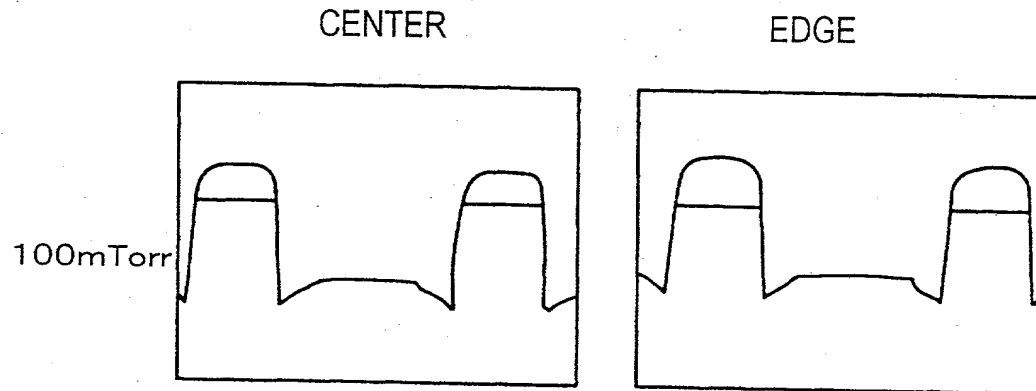


FIG.3(b)

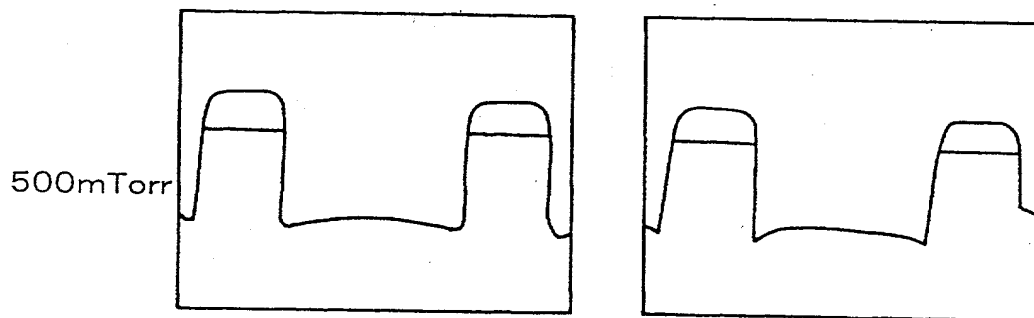


FIG.3(c)

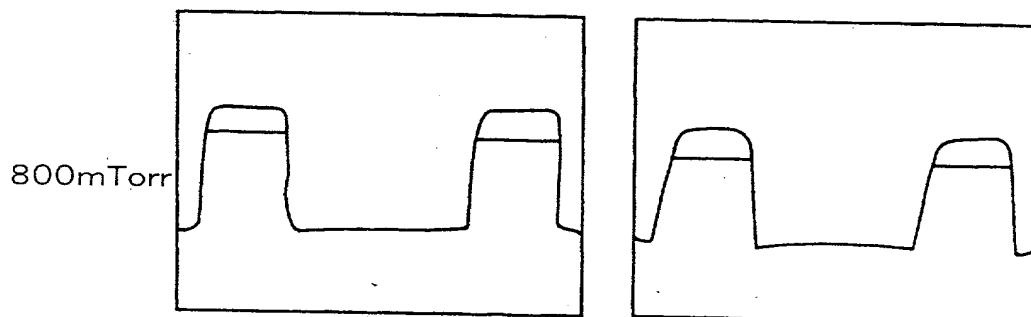


FIG. 4

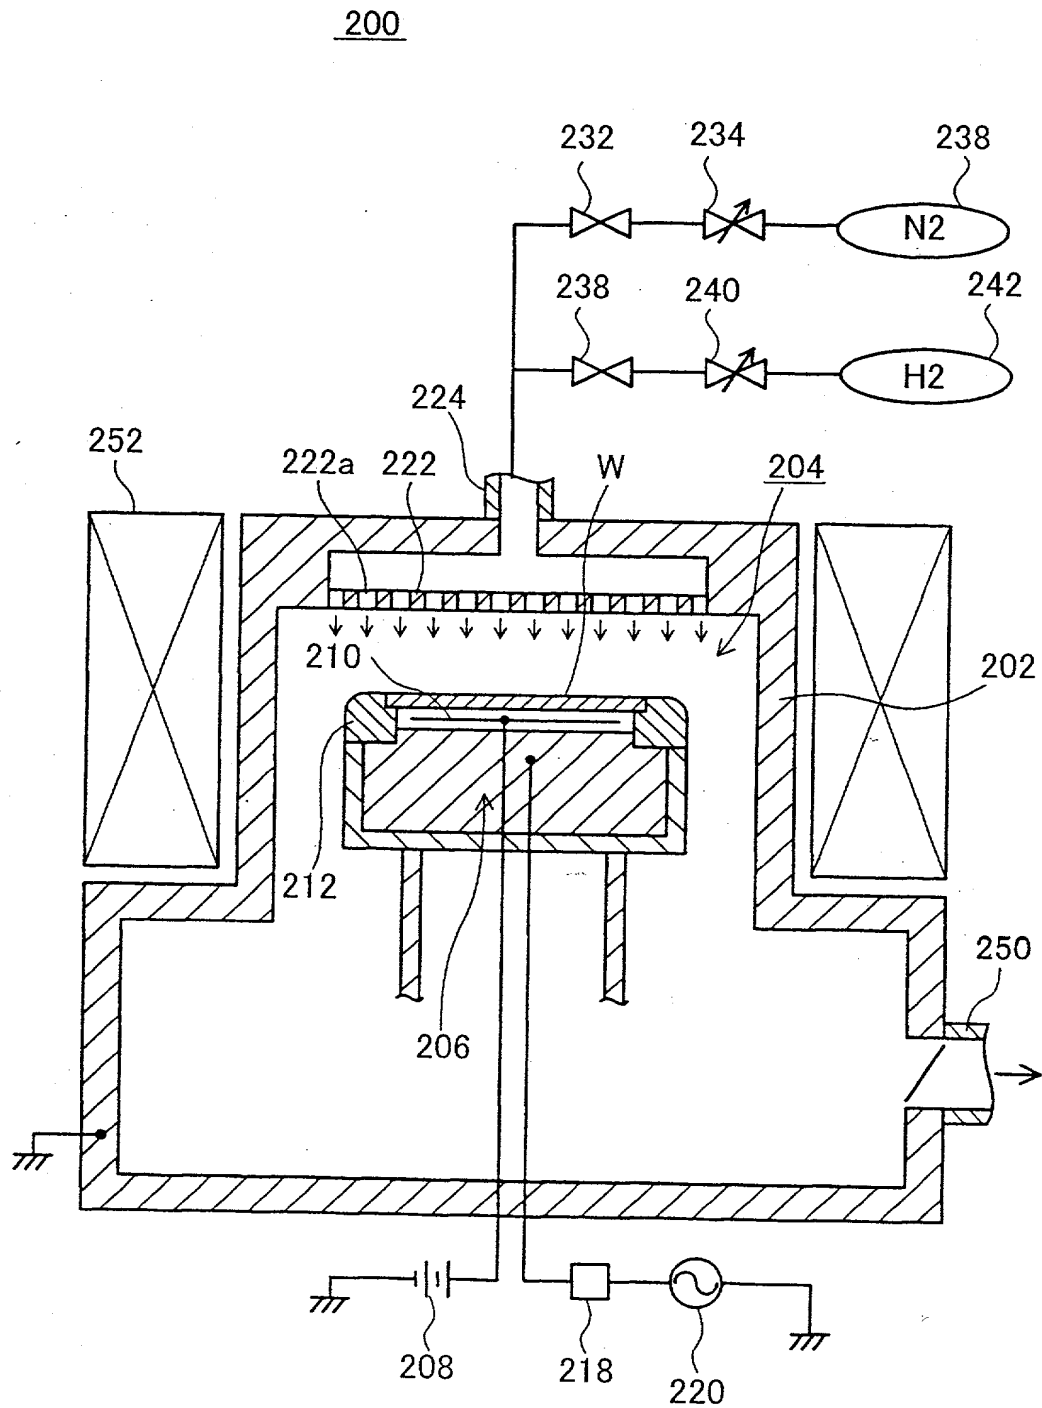


FIG.5(a)

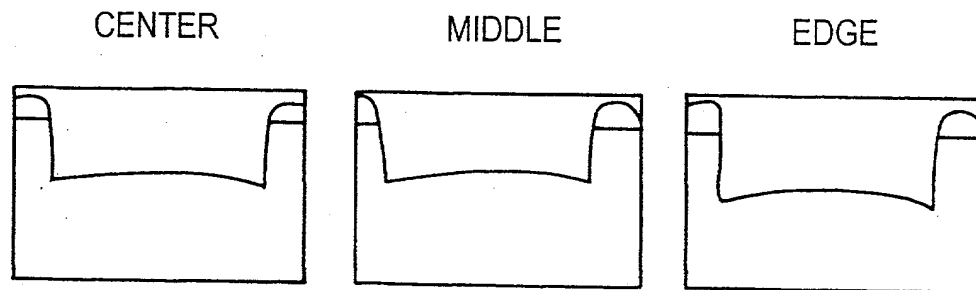


FIG.5(b)

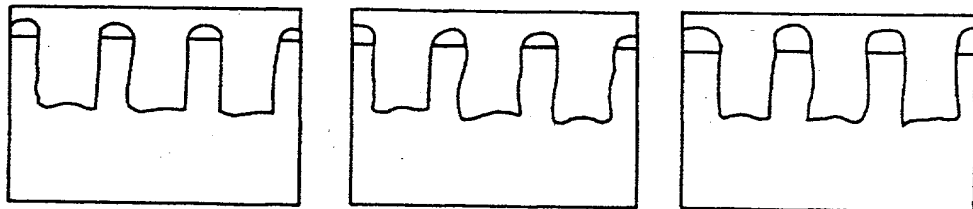


FIG.5(c)


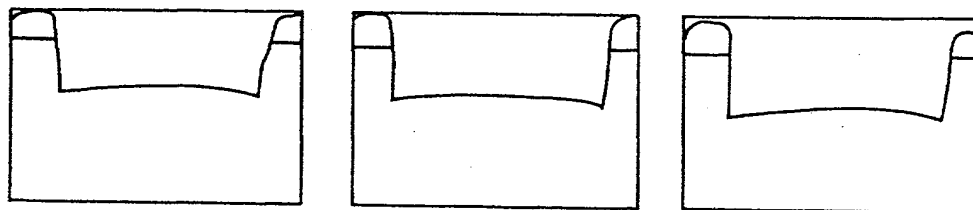


FIG.5(d)



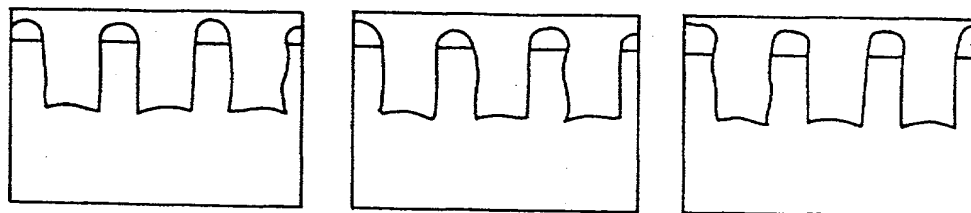

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: Method of Etching

the specification of which ☐ is attached and/or ☒ was filed as United States Application Serial No. \_\_\_\_\_ on \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable); or was filed as PCT International Application No. PCT/JP00/05623 on August 23, 2000 and was amended on September 14, 2001 (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
Japan	JP11-235191	August 23, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
PCT	PCT/JP00/05623	August 23, 2000	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Elmer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; and \_\_\_\_\_ Please address all correspondence to FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P. 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor <u>Ken KOBAYASHI</u>	Inventor's Signature <u>Ken Kobayashi</u>	Date <u>November 15, 2001</u>
Residence <u>California, U.S.A</u>	Citizenship <u>Japanese</u>	
Post Office Address <u>c/o TOKYO ELECTRON AMERICA, INC. SANTA CLARA OFFICE</u> <u>2953 BUNKER HILL LANE, SUITE 300, SANTA CLARA, CALIFORNIA 95054 U.S.A</u>		

Listing of Inventors Continued on Page 2 hereof. ☒ Yes ☐ No

Listing of Inventors Continued From Page 1 hereof.

Full Name of Second Inventor Masaaki HAGIHARA	Inventor's Signature <i>Masaaki Hagihara</i>	Date November 20, 2001
Residence Massachusetts, U.S.A.	Citizenship Japanese	
Post Office Address c/o TOKYO ELECTRON MASSACHUSETTS, INC. BOSTON PLANT 123, BRIMBAL AVENUE, BEVERLY, MA 019054 U.S.A.		
Full Name of Third Inventor Wakako NAITO	Inventor's Signature <i>Wakako Naito</i>	Date November 1, 2001
Residence Yamanashi, Japan	Citizenship Japanese	
Post Office Address c/o TOKYO ELECTRON AT LIMITED 2381-1, Kitagejo, Fujii-cho, Nirasaki-shi, Yamanashi 407-0003 Japan		
Full Name of Fourth Inventor Koichiro INAZAWA	Inventor's Signature <i>Koichiro Inazawa</i>	Date November 1, 2001
Residence Yamanashi, Japan	Citizenship Japanese	
Post Office Address c/o TOKYO ELECTRON AT LIMITED 2381-1, Kitagejo, Fujii-cho, Nirasaki-shi, Yamanashi 407-0003 Japan		
Full Name of Fifth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Sixth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Seventh Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Eighth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Ninth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		
Full Name of Tenth Inventor	Inventor's Signature	Date
Residence	Citizenship	
Post Office Address		